

4





3

2

1

- NOTES:
1. APPLICABLE STANDARDS/SPECIFICATIONS:
ASME Y14.5M-1994, DIMENSIONING AND TOLERANCING
ASME Y14.38-1999, ABBREVIATIONS
 2. COMPONENT OR ITEM TO BE COMPLIANT WITH THE MOST
CURRENT REVISION OF THE RoHS / Wee DIRECTIVE FOR
THE REDUCTION OF HAZARDOUS SUBSTANCES AND
MATERIALS.
 3. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 4. TABLE PRINT: USE CHART ASSOCIATED WITH AIRMAN
ASSEMBLY PART NUMBER. SUFFIXES (EXAMPLES -CLR AND -
BLK) ATTACHED TO THE END OF THE AIRMAN PART NUMBER
WILL INDICATE THE ANODIZATION COLOR (IF APPLICABLE)
 5. ITEMS INDIVIDUALLY SEALED IN BAG

REV	DATE	EC #	ZONE	DESCRIPTION	DRAWN	CKD
A	2020-07-25			ORIGINATED	NR	JMA

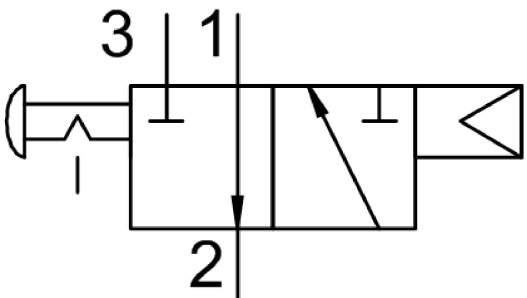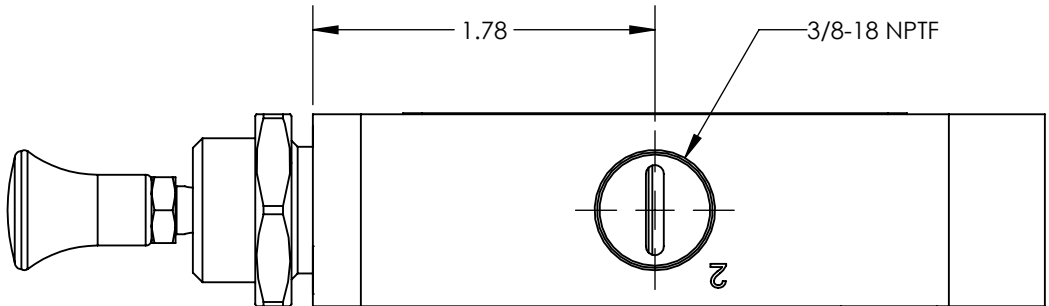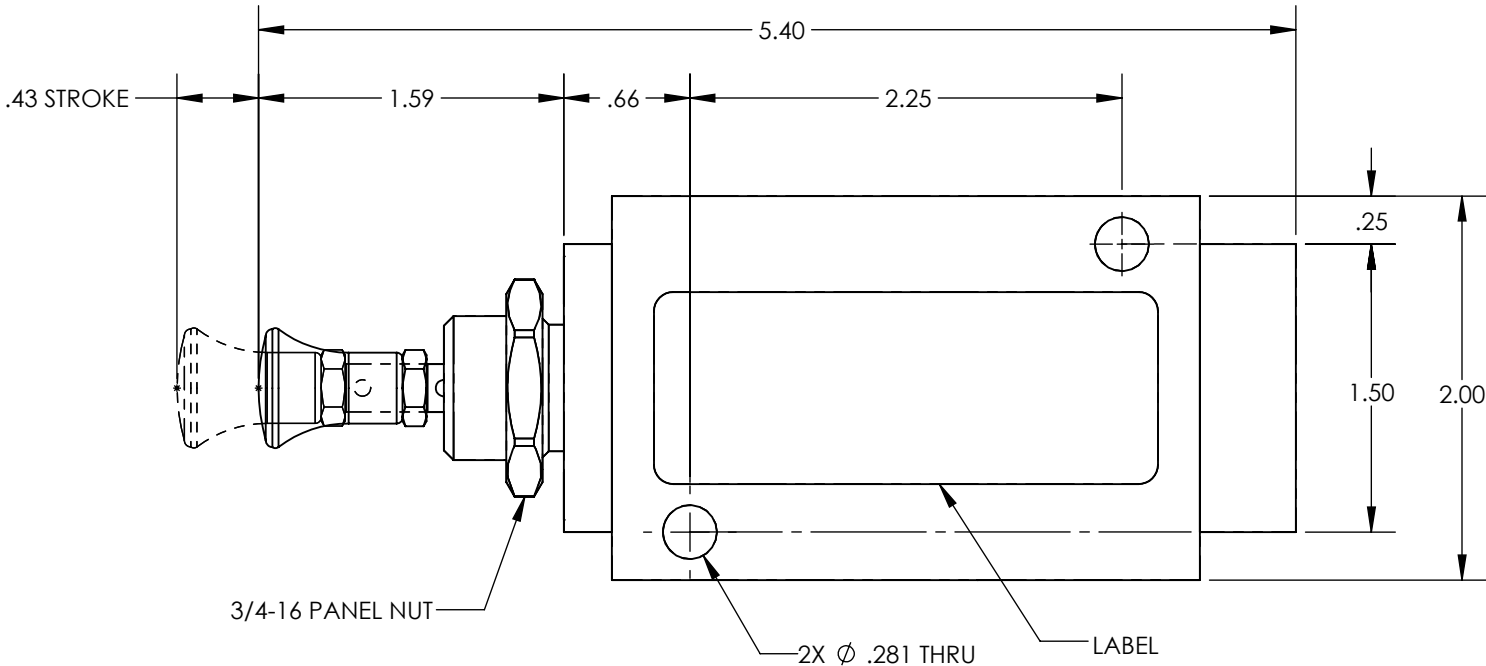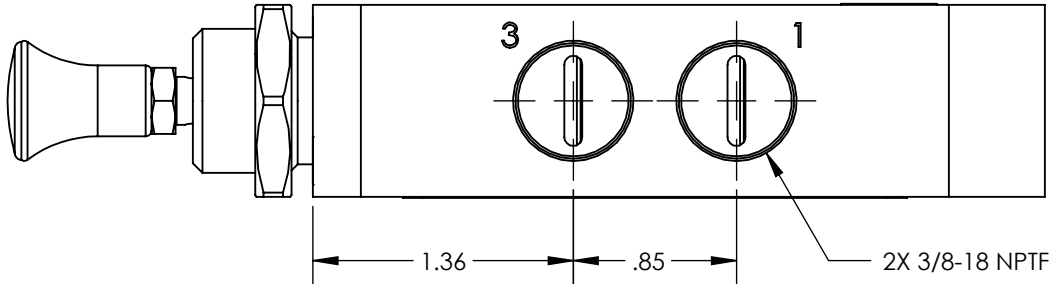

AIRman PART NUMBER CHART	
AIRman PART NUMBER	ANODIZATION COLOR
V38104S221-K11	NON-ANODIZED
V38104S221-K11-BLK	BLACK-ANODIZED
V38104S221-K11-CLR	CLEAR-ANODIZED

NOTE: PART MUST BE CLEAN AND BURR FREE
MFG TOLERANCES UNLESS OTHERWISE NOTED:
ALL UNITS ARE INCHES
(2) DECIMAL PLACES: ±.01
(3) DECIMAL PLACES: ±.005
ANGLES: ±.5°
BREAK ALL EDGES .005/.015 X 45°
MACHINED SURFACES TO BE 63 RMS
CRITICAL CHARACTERISTIC - CONTROL
PLAN REQUIRED

CONFIDENTIAL: THIS DRAWING OR
ANY PART THEREOF IS PROPRIETARY
AND MAY NOT BE REPRODUCED OR
COPIED WITHOUT WRITTEN CONSENT
OF AIRMAN PRODUCTS

DRAWN BY	NR	DESCRIPTION
DRAWN DATE	2020-07-25	VALVE, .38 NPT, 3-2, AP-PPDET
DRAWING SIZE	B	
MATERIAL	SEE NOTES	PART NUMBER
SCALE	1:1	V38104S221-K11
SHEET #	1 OF 1	

CUSTOMER PRINT